

STEFANO

THE ITALIAN QUALITY

STEFANO WSD75/35 T EFFLUENT PUMP

With small size and light weight, the WSD (50Hz) series pump is especially suitable for the rural wells water pumping, farmland irrigation and drainage, garden watering, water spraying and family households, as well as other applications such as industrial, construction, aquaculture, fish ponds, etc



TECHNICAL

Max. Flow: 22m³/h

Max. Head: 10

Maximum liquid temperature +40°C

pH level from 4-10

Passage of suspended solids up to 50mm

Power frequency is 50Hz. Voltage fluctuation range ±10%


APPLICATIONS

Decantation pit, sewage pit and slurry collection pit pump out

Pump out of lavatory/foul water with possible floating solids contents

Domestic and industrial lavatory/black water handling systems.

PERFORMANCE CURVE

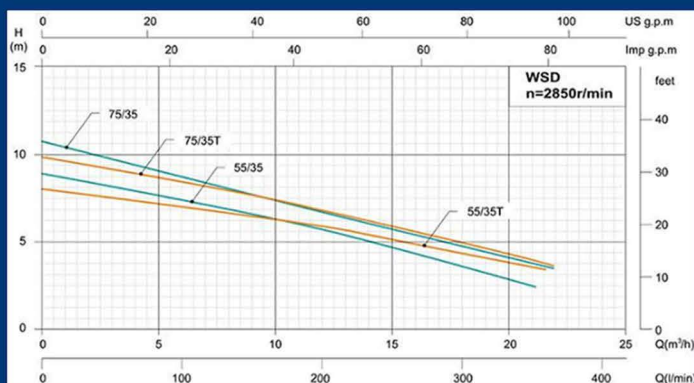

STEFANO

THE ITALIAN QUALITY

